



## Known For Reliability For Over 88 Years

BIRO slicers are designed to provide trouble free service in a WET MEAT ROOM ENVIRONMENT with features such as Waterproof Motor, Electrical Components and Connections plus Non-Corrosive Metals, all of which add to the water resistant benefits of this slicer.

Our B300M has a 12" (300mm) Hollow Ground Alloy Steel blade that allows a slicing capacity to nearly 7-1/2" (190mm) on round products at a thickness from 0 to 9/16" (0-14mm) slice.

Our B350M has a 13-3/4" (350mm) Hollow Ground Alloy Steel that allows a slicing capacity to nearly 10" (254mm) on round products at a thickness from 0 to 1" (0-25mm) slice.

Our B350MV has a 13-3/4" (350mm) Hollow Ground Alloy Steel that allows a slicing capacity to nearly 10-1/2" (266mm) on round products at a thickness from 0 to 13/16" (0-21mm) slice.

Index knob has indicator positions showing rotation of one millimeter increments for consistency within multiple slicing stations.

Built In Safety Features - Blade protective ring guard prevents exposed blade edge when the blade cover is removed for cleaning. Product table lockout prevents thickness gauge from being opened during cleaning. Emergency shut-off and thermal overload/no volt release prevents accidental turn on after power outages. Remote sharpener mounts easily when needed but is stored away from the slicer when not in use providing added hygiene security to the slicing operation.



MODEL B300M  
(DETACHABLE  
SHARPENER NOT  
SHOWN)



MODEL B350M  
WITH DETACHABLE  
SHARPENER





MODEL B350MV  
(DETACHABLE  
SHARPENER NOT  
SHOWN)

B300M / B350M / B350MV



*Stands alone for quality  
and value since 1921*

| MODELS              | B300M<br>GRAVITY FEED MANUAL SLICER  | B350M<br>GRAVITY FEED MANUAL SLICER   | B350MV<br>HORIZONTAL FEED MANUAL SLICER   |
|---------------------|--|---|---|
| CONSTRUCTION        | BODY – ANODIZED POLISHED ALUMINUM CAST WITH NON-CORROSIVE METAL FRAME  |   |   |
| MOTORS              | IP 65 – 1/2HP (.35 KW) 115V 60 HZ 1 PH INTERNALLY COOLED, WATER RESISTANT<br>IP 65 – 1/2HP (.35 KW) 220V 50 HZ 1 PH INTERNALLY COOLED, WATER RESISTANT   |   |   |
| STANDARD FEATURES   | AUTOMATIC SPRING LOADED BELT TENSIONING<br>POLYGROOVE BELT DRIVE PROVIDES OPTIMUM PERFORMANCE<br>BLADE PROTECTIVE RING GUARD PREVENTS EXPOSED BLADE EDGE DURING CLEANING<br>TILT-AWAY PRODUCT TABLE LOCKOUT PREVENTS THICKNESS GAUGE FROM BEING OPENED DURING CLEANING (B350M & B350MV)<br>REMOVABLE PRODUCT TABLE FOR EASIER CLEANING (B300M)<br>THERMAL OVERLOAD/NO VOLT RELEASE PREVENTS ACCIDENTAL TURN ON AFTER POWER OUTAGES<br>GREEN PUSHBUTTON ON-OFF CONTROL AND RED E-STOP BUTTON<br>WATER RESISTANT IP 65 MOTOR, WIRING HARNESS, ELECTRONIC CONTROLS, & CONNECTORS<br>DETACHABLE SHARPENER ASSEMBLY – HELPS PROVIDE HYGIENIC SLICING AREA<br>PRODUCT FENCE – FOR USE ON NARROW PRODUCTS |   |   |
| BLADE               | 12" (300MM)<br>HOLLOW GROUND ALLOY STEEL   | 13-3/4" (350MM)<br>HOLLOW GROUND ALLOY STEEL  | 13-3/4" (350MM)<br>HOLLOW GROUND ALLOY STEEL  |
| MAX. ROUND CUT      | 7.5" (190MM)   | 10" (254 MM)  | 10-1/2" (266MM)   |
| MAX. RECT. CUT      | 10" (254MM) X 5.5" (139MM)   | 12-1/2" x 9" (317MM x 228MM)  | 12" x 10" (304MM x 254MM)   |
| CERTIFICATION       | NSF, (CE – CALL FACTORY)   | NSF, ETL (U.S.), ETL (CANADA),<br>ETL-SANITATION, (CE – CALL FACTORY)   | NSF, ETL (U.S.), ETL (CANADA),<br>ETL-SANITATION, (CE – CALL FACTORY)   |
| WEIGHT              | UNCRATED – 72 LBS. (33 KG)<br>CRATED – 101 LBS. (46 KG)  | UNCRATED – 77 LBS. (35 KG)<br>CRATED – 121 LBS. (55 KG)   | UNCRATED – 77 LBS. (35 KG)<br>CRATED – 121 LBS. (55 KG)   |
| DIMENSIONS UNCRATED | 18"L (456MM) DEPTH FOOT-TO-FOOT<br>SPACE 25-3/4" (654MM) OVERALL<br>14"W (366MM) FOOT-TO-FOOT<br>SPACE 22" (560MM) OVERALL<br>17-3/4"H (450MM)   | 22"L (558MM) DEPTH, FOOT-TO-FOOT<br>SPACE 32" (813mm) OVERALL<br>16"W (406MM) FOOT-TO-FOOT<br>SPACE 27" (685MM) OVERALL<br>23"H (584MM) | 22"L (560MM) DEPTH, FOOT-TO-FOOT<br>SPACE 32" (813mm) OVERALL<br>16"W (432MM) FOOT-TO-FOOT<br>SPACE 25" (635MM) OVERALL<br>21"H (533MM) |
| DIMENSIONS CRATED   | 28"L (711MM) x 24"W (609MM) x<br>23"H (584MM)  | 33"L (838MM) x 28"W (711MM) x<br>28"H (711MM)   | 33"L (838MM) x 28"W (685MM) x<br>27"H (711MM)   |

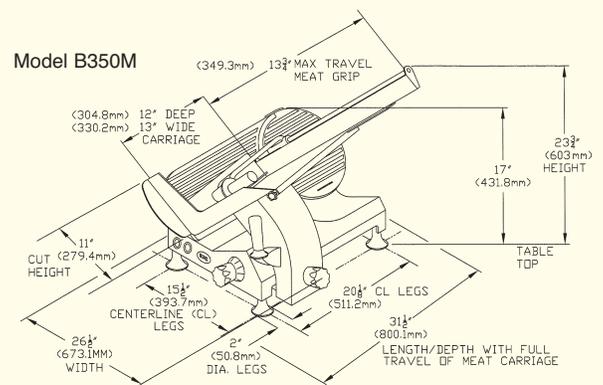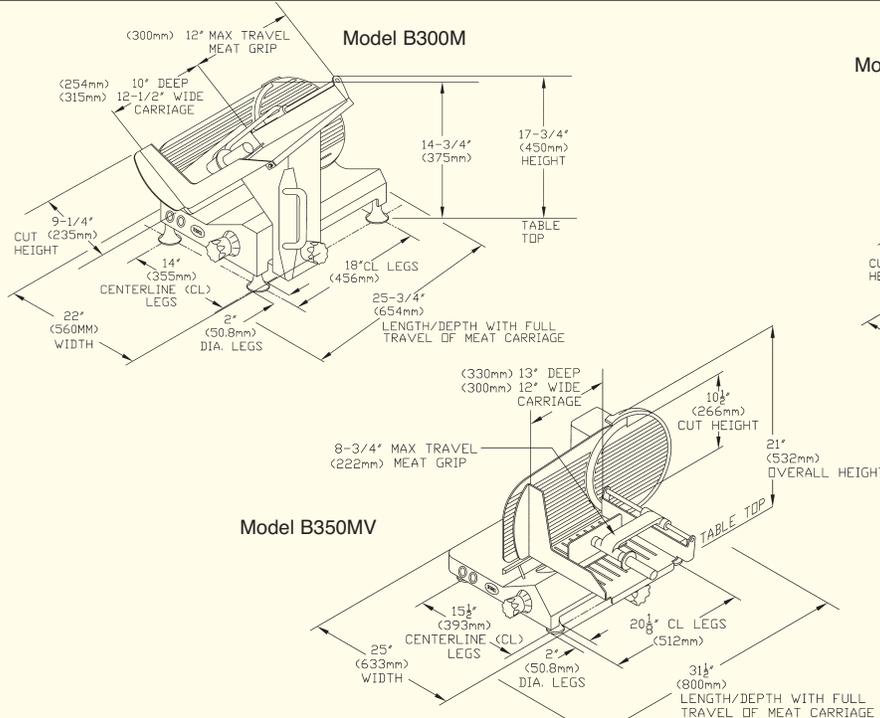

**THE BIRO MANUFACTURING COMPANY**  
**1114 WEST MAIN STREET**  
**MARBLEHEAD, OH 43440-2099 U.S.A.**  
**Phone: (419) 798-4451**  
**Fax: (419) 798-9106**  
<http://www.birosaw.com>  
**sales@birosaw.com**

ITEM NO.: LIT-B300M/B350M/B350MV-354

FORM NO.: Md B300M/B350M/B350MV-354-05-09-1-ENG-MARK

ALL SPECIFICATIONS CONTAINED HEREIN ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION.

Service is available from over 245 locations worldwide